


# SK 10 DGDL 126 ET

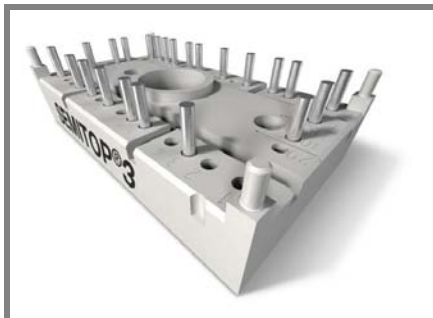

**SEMITOP® 3**

**3-phase bridge rectifier +  
brake chopper +3-phase  
bridge inverter**  
**SK 10 DGDL 126 ET**


Preliminary Data

## Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminum oxide ceramic (DCB)
- Trench technology IGBT
- CAL High Density FWD
- Integrated NTC temperature sensor

## Typical Applications\*

- Inverter

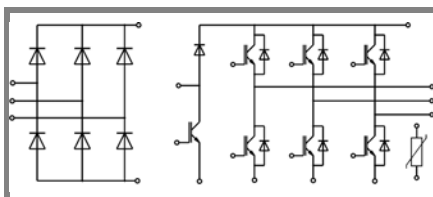

DGDL - ET

Absolute Maximum Ratings		$T_s = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
<b>IGBT - Inverter, Chopper</b>			
$V_{CES}$		1200	V
$I_C$	$T_s = 25$ (80) $^\circ\text{C}$	15 (11)	A
$I_{CRM}$	$I_{CRM} = 2 \times I_{Cnom}$ , $t_p = 1$ ms	16	A
$V_{GES}$		$\pm 20$	V
$T_j$		-40 ... +150	$^\circ\text{C}$
<b>Diode - Inverter, Chopper</b>			
$I_F$	$T_s = 25$ (80) $^\circ\text{C}$	25 (17)	A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$ , $t_p = 1$ ms	50	A
$T_j$		-40 ... +150	$^\circ\text{C}$
<b>Rectifier</b>			
$V_{RRM}$		1600	V
$I_F$	$T_s = 80$ $^\circ\text{C}$	21	A
$I_{FSM} / I_{TSM}$	$t_p = 10$ ms, sin 180 $^\circ$ , $T_j = 25$ $^\circ\text{C}$	220	A
$I_t^2$	$t_p = 10$ ms, sin 180 $^\circ$ , $T_j = 25$ $^\circ\text{C}$	240	A <sup>2</sup> s
$T_j$		-40 ... +150	$^\circ\text{C}$
$T_{sol}$	Terminals, 10s	260	$^\circ\text{C}$
$T_{stg}$		-40 ... +125	$^\circ\text{C}$
$V_{isol}$	AC, 1 min. / 1s	2500 / 3000	V

Characteristics		$T_s = 25^\circ\text{C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT - Inverter, Chopper</b>					
$V_{CEsat}$	$I_C = 8$ A, $T_j = 25$ (125) $^\circ\text{C}$		1,7 (2)	2,1 (2,4)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$ , $I_C = 0,3$ mA	5	5,8	6,5	V
$V_{CE(TO)}$	$T_j = 25$ $^\circ\text{C}$ (125) $^\circ\text{C}$		1 (0,9)	1,2 (1,1)	V
$r_T$	$T_j = 25$ $^\circ\text{C}$ (125) $^\circ\text{C}$		87 (138)	113 (162)	m $\Omega$
$C_{ies}$	$V_{CE} = 25$ V, $V_{GE} = 0$ V, $f = 1$ MHz		0,7		nF
$C_{oes}$	$V_{CE} = 25$ V, $V_{GE} = 0$ V, $f = 1$ MHz		0,2		nF
$C_{res}$	$V_{CE} = 25$ V, $V_{GE} = 0$ V, $f = 1$ MHz		0,1		nF
$R_{th(j-s)}$	per IGBT			2	K/W
$t_{d(on)}$	under following conditions		85		ns
$t_r$	$V_{CC} = 600$ V, $V_{GE} = \pm 15$ V		30		ns
$t_{d(off)}$	$I_C = 8$ A, $T_j = 125$ $^\circ\text{C}$		430		ns
$t_f$	$R_{Gon} = R_{Goff} = 75$ $\Omega$		90		ns
$E_{on}$	inductive load		1		mJ
$E_{off}$			1		mJ
<b>Diode - Inverter, Chopper</b>					
$V_F = V_{EC}$	$I_F = 8$ A, $T_j = 25$ (125) $^\circ\text{C}$		1,9 (2)	2,2	V
$V_{(TO)}$	$T_j = 25$ $^\circ\text{C}$ (125) $^\circ\text{C}$		1 (0,8)	1,1 (0,9)	V
$r_T$	$T_j = 25$ $^\circ\text{C}$ (125) $^\circ\text{C}$		40 (53)	47	m $\Omega$
$R_{th(j-s)}$	per diode			2,1	K/W
$I_{RRM}$	under following conditions		21		A
$Q_{rr}$	$I_F = 15$ A, $V_R = 600$ V		3,5		$\mu\text{C}$
$E_{rr}$	$V_{GE} = 0$ V, $T_j = 125$ $^\circ\text{C}$		1,4		mJ
	$di_F/dt = 570$ A/ $\mu\text{s}$				
<b>Diode rectifier</b>					
$V_F$	$I_F = 15$ A, $T_j = 25$ ( $^\circ$ ) $^\circ\text{C}$		1,1		V
$V_{(TO)}$	$T_j = 150$ $^\circ\text{C}$		0,8		V
$r_T$	$T_j = 150$ $^\circ\text{C}$		20		m $\Omega$
$R_{th(j-s)}$	per diode			2,7	K/W
<b>Temperatur sensor</b>					
$R_{ts}$	5 %, $T_r = 25$ (100) $^\circ\text{C}$		5000(493)		$\Omega$
<b>Mechanical data</b>					
w			30		g
$M_s$	Mounting torque			2,5	Nm

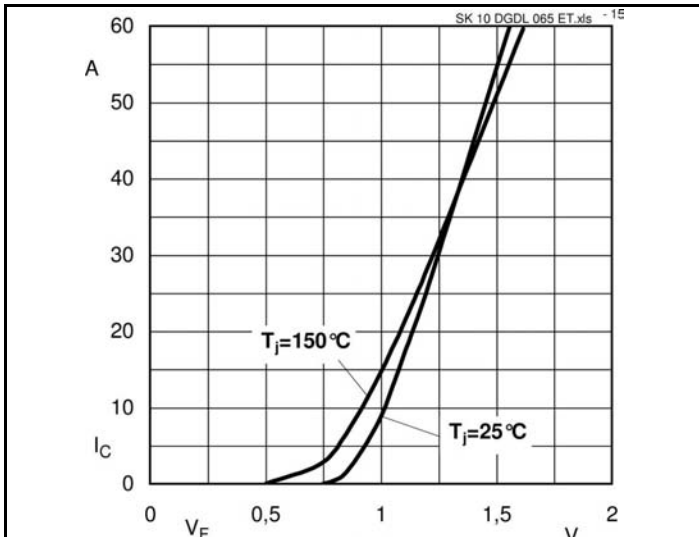


Fig. 15 Input Bridge Diode forward characteristic

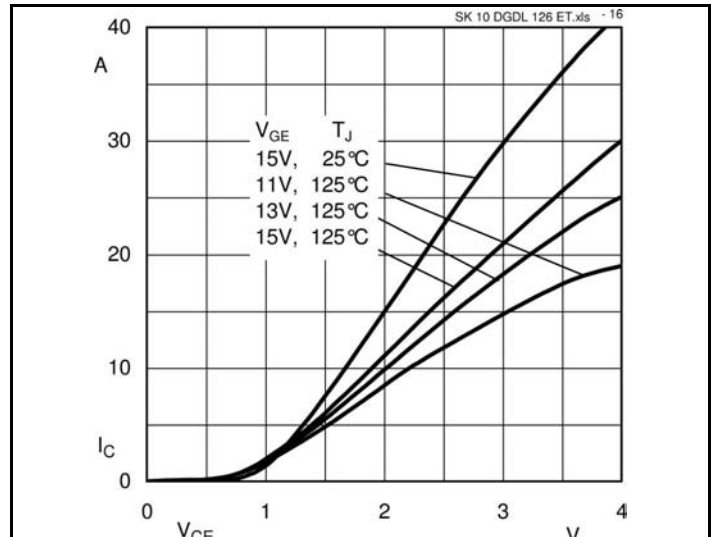


Fig. 16 Typical Output Characteristic

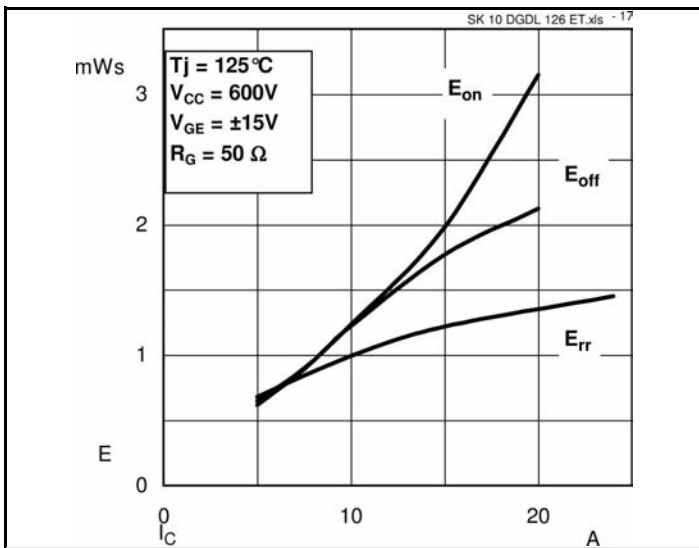


Fig. 17 Turn-on/-off energy =  $f(I_c)$

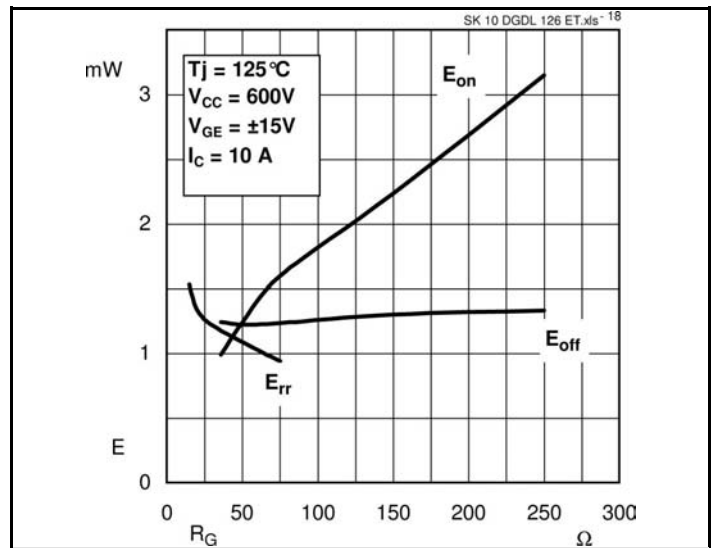


Fig. 18 Turn-on/-off energy =  $f(R_G)$





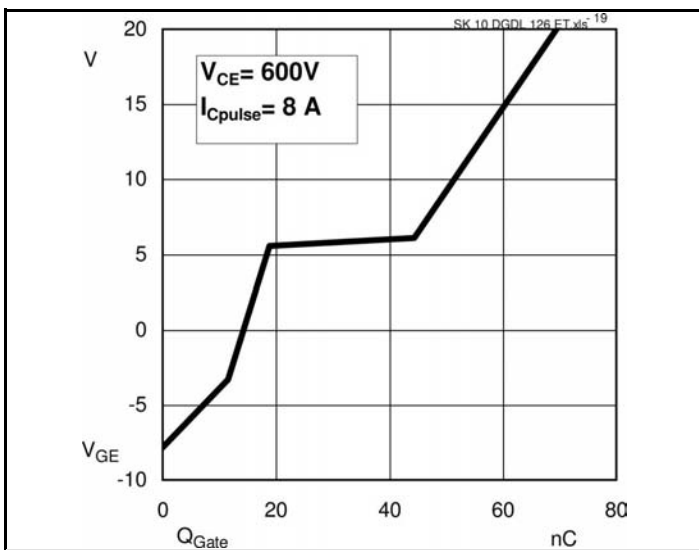



Fig. 19 Typical gate charge characteristic

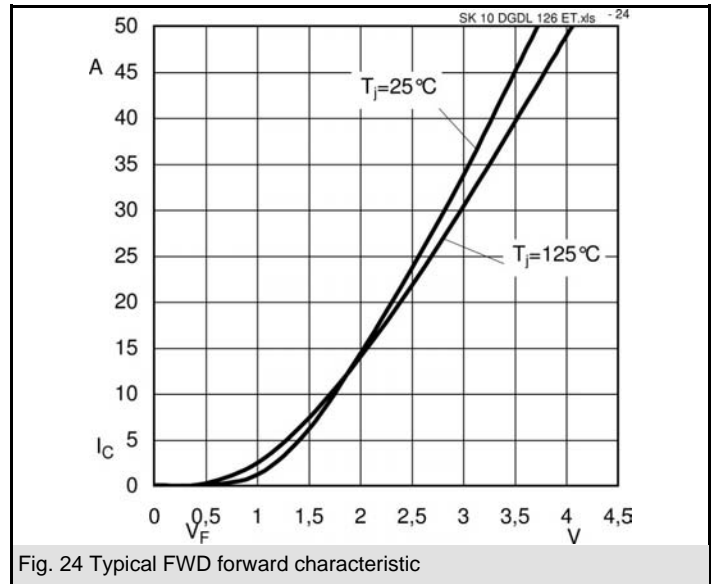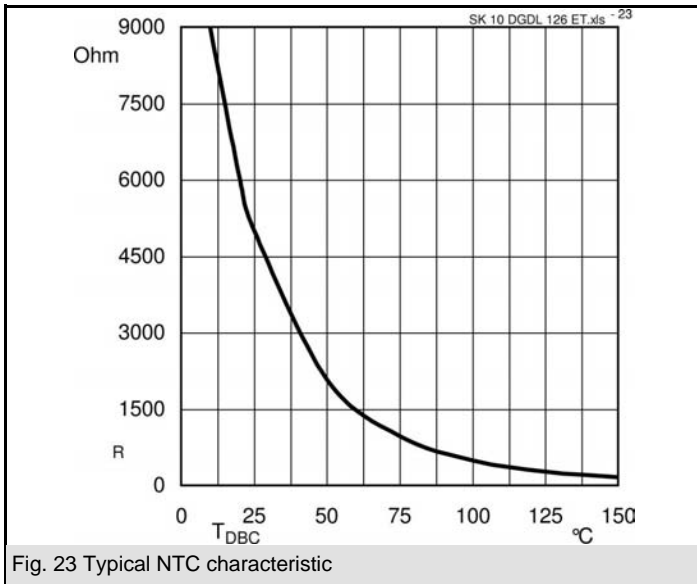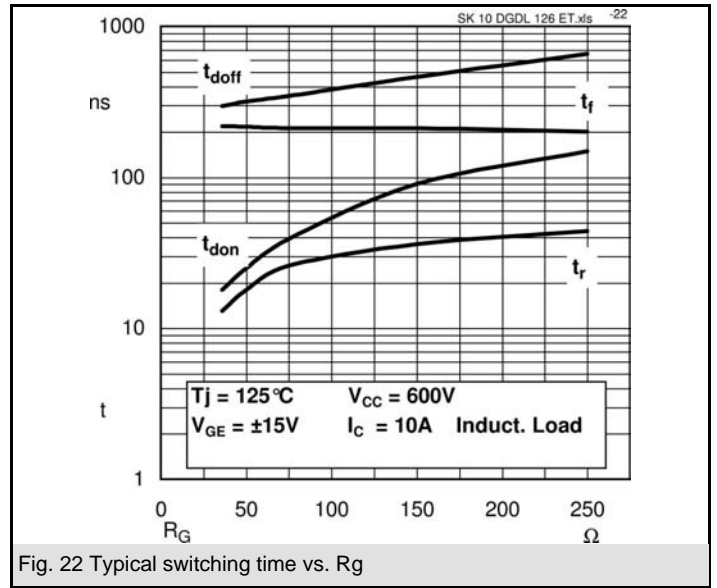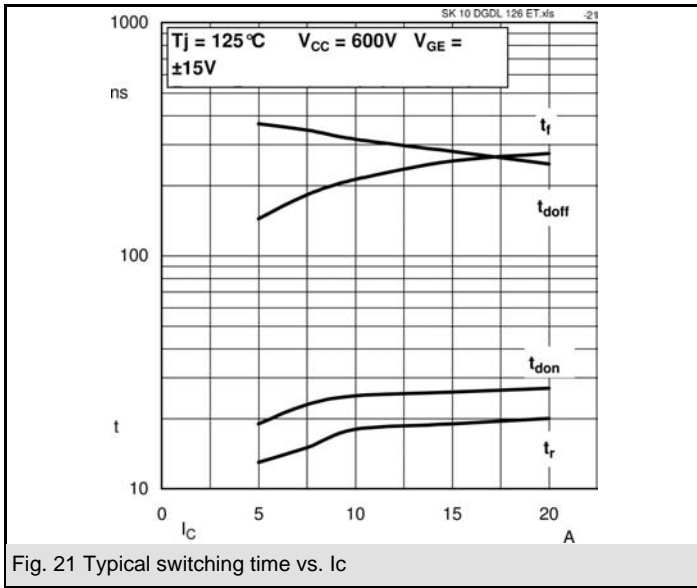


# SK 10 DGDL 126 ET

UL Recognized  
File no. E63 532

Dimensions in mm

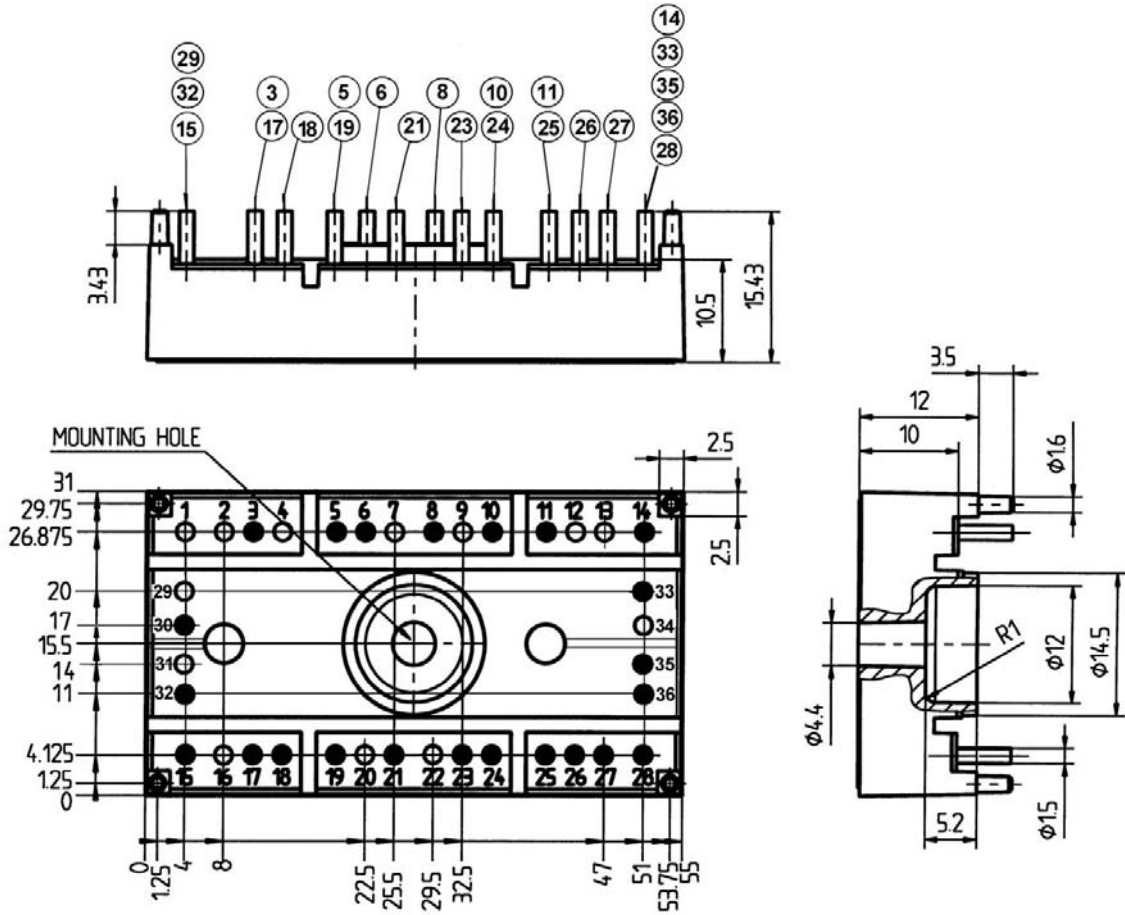

Case T 49 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

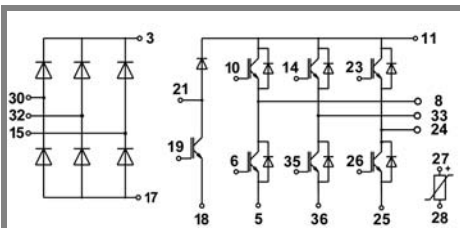

Case T 49

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.