

# SEMiX151GD126HDs



SEMiX<sup>®</sup> 13

## Trench IGBT Modules

### SEMiX151GD126HDs

#### Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$  with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

#### Typical Applications\*

- AC inverter drives
- UPS
- Electronic Welding

#### Remarks

- Case temperatur limited to  $T_C=125^{\circ}C$  max.
- Not for new design



GD

Absolute Maximum Ratings				
Symbol	Conditions		Values	Unit
<b>IGBT</b>				
$V_{CES}$			1200	V
$I_C$	$T_j = 150^{\circ}C$	$T_c = 25^{\circ}C$	168	A
		$T_c = 80^{\circ}C$	119	A
$I_{Cnom}$			100	A
$I_{CRM}$	$I_{CRM} = 2 \times I_{Cnom}$		200	A
$V_{GES}$			-20 ... 20	V
$t_{psc}$	$V_{CC} = 600 V$ $V_{GE} \leq 20 V$ $V_{CES} \leq 1200 V$	$T_j = 125^{\circ}C$	10	$\mu s$
$T_j$			-40 ... 150	$^{\circ}C$
<b>Inverse diode</b>				
$I_F$	$T_j = 150^{\circ}C$	$T_c = 25^{\circ}C$	152	A
		$T_c = 80^{\circ}C$	105	A
$I_{Fnom}$			100	A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$		200	A
$I_{FSM}$	$t_p = 10 ms, \sin 180^{\circ}, T_j = 25^{\circ}C$		700	A
$T_j$			-40 ... 150	$^{\circ}C$
<b>Module</b>				
$I_{t(RMS)}$			600	A
$T_{stg}$			-40 ... 125	$^{\circ}C$
$V_{isol}$	AC sinus 50Hz, t = 1 min		4000	V

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
<b>IGBT</b>						
$V_{CE(sat)}$	$I_C = 100 A$ $V_{GE} = 15 V$ chipelevel	$T_j = 25^{\circ}C$	1.7	2.1		V
		$T_j = 125^{\circ}C$	2	2.45		V
$V_{CE0}$			$T_j = 25^{\circ}C$	1	1.2	V
			$T_j = 125^{\circ}C$	0.9	1.1	V
$r_{CE}$	$V_{GE} = 15 V$	$T_j = 25^{\circ}C$	7.0	9.0		m $\Omega$
		$T_j = 125^{\circ}C$	11.0	13.5		m $\Omega$
$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C = 4 mA$		5	5.8	6.5	V
$I_{CES}$	$V_{GE} = 0 V$ $V_{CE} = 1200 V$	$T_j = 25^{\circ}C$	0.1	0.3		mA
		$T_j = 125^{\circ}C$				mA
$C_{ies}$	$V_{CE} = 25 V$ $V_{GE} = 0 V$		$f = 1 MHz$		7.2	nF
$C_{oes}$			$f = 1 MHz$		0.38	nF
$C_{res}$			$f = 1 MHz$		0.33	nF
$Q_G$	$V_{GE} = - 8 V...+ 15 V$				800	nC
$R_{Gint}$	$T_j = 25^{\circ}C$				7.50	$\Omega$
$t_{d(on)}$	$V_{CC} = 600 V$ $I_C = 100 A$	$T_j = 125^{\circ}C$			290	ns
$t_r$		$T_j = 125^{\circ}C$			50	ns
$E_{on}$	$R_{G on} = 1.7 \Omega$		$T_j = 125^{\circ}C$		12	mJ
$t_{d(off)}$	$R_{G off} = 1.7 \Omega$		$T_j = 125^{\circ}C$		605	ns
$t_f$			$T_j = 125^{\circ}C$		110	ns
$E_{off}$			$T_j = 125^{\circ}C$		14	mJ
$R_{th(j-c)}$	per IGBT				0.21	K/W

# SEMiX151GD126HDs



SEMiX® 13

## Trench IGBT Modules

### SEMiX151GD126HDs

#### Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$  with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

#### Typical Applications\*

- AC inverter drives
- UPS
- Electronic Welding

#### Remarks

- Case temperatur limited to  $T_C=125^\circ\text{C}$  max.
- Not for new design

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
<b>Inverse diode</b>						
$V_F = V_{EC}$	$I_F = 100\text{ A}$ $V_{GE} = 0\text{ V}$ chip	$T_j = 25^\circ\text{C}$		1.6	1.80	V
		$T_j = 125^\circ\text{C}$		1.6	1.8	V
$V_{F0}$		$T_j = 25^\circ\text{C}$	0.9	1	1.1	V
		$T_j = 125^\circ\text{C}$	0.7	0.8	0.9	V
$r_F$		$T_j = 25^\circ\text{C}$	5.0	6.0	7.0	m $\Omega$
		$T_j = 125^\circ\text{C}$	7.0	8.0	9.0	m $\Omega$
$I_{RRM}$	$I_F = 100\text{ A}$	$T_j = 125^\circ\text{C}$		125		A
$Q_{rr}$	$di/dt_{off} = 2900\text{ A}/\mu\text{s}$	$T_j = 125^\circ\text{C}$		26		$\mu\text{C}$
$E_{rr}$	$V_{GE} = -15\text{ V}$ $V_{CC} = 600\text{ V}$	$T_j = 125^\circ\text{C}$		11.5		mJ
$R_{th(j-c)}$	per diode				0.36	K/W
<b>Module</b>						
$L_{CE}$				20		nH
$R_{CC'+EE'}$	res., terminal-chip	$T_C = 25^\circ\text{C}$		0.7		m $\Omega$
		$T_C = 125^\circ\text{C}$		1		m $\Omega$
$R_{th(c-s)}$	per module			0.04		K/W
$M_s$	to heat sink (M5)		3		5	Nm
$M_t$		to terminals (M6)	2.5		5	Nm
						Nm
$w$					350	g
<b>Temperatur Sensor</b>						
$R_{100}$	$T_C=100^\circ\text{C}$ ( $R_{25}=5\text{ k}\Omega$ )			$493 \pm 5\%$		$\Omega$
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$ ; $T[\text{K}]$ ;			$3550$ $\pm 2\%$		K



GD

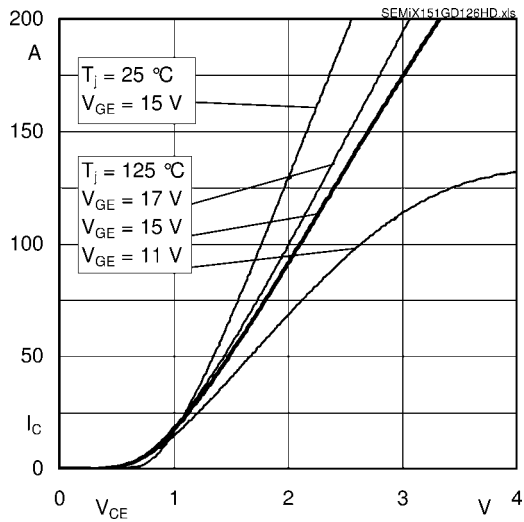


Fig. 1: Typ. output characteristic, inclusive  $R_{CC'+EE'}$

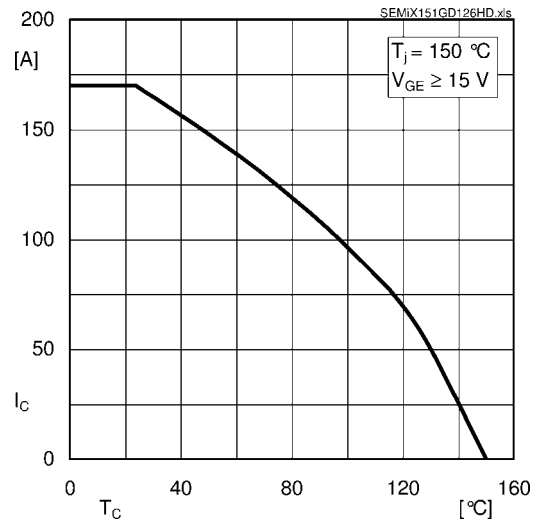


Fig. 2: Rated current vs. temperature  $I_C = f(T_C)$

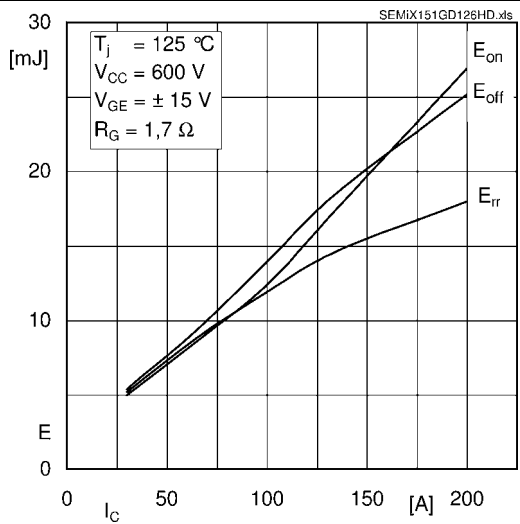


Fig. 3: Typ. turn-on /-off energy =  $f(I_C)$

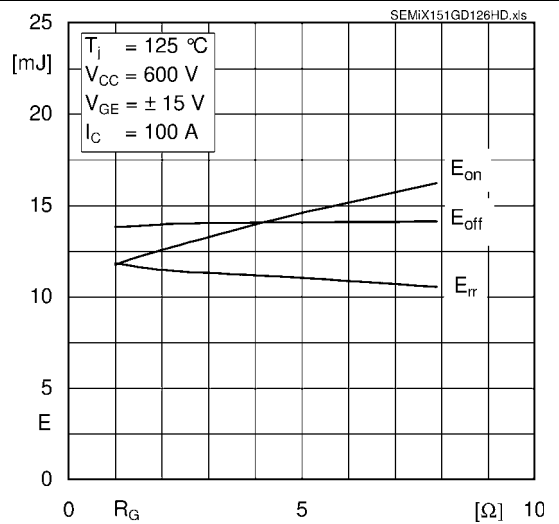


Fig. 4: Typ. turn-on /-off energy =  $f(R_G)$

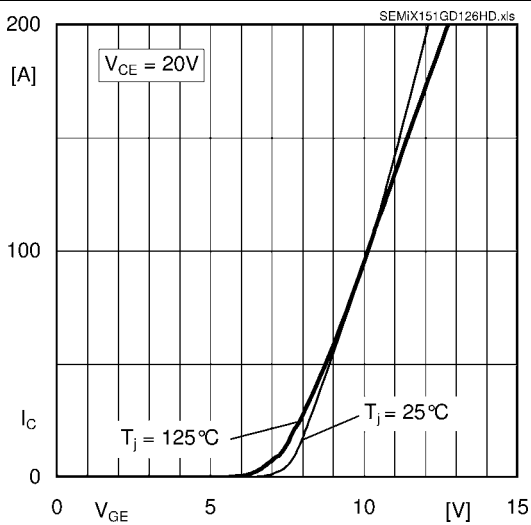


Fig. 5: Typ. transfer characteristic

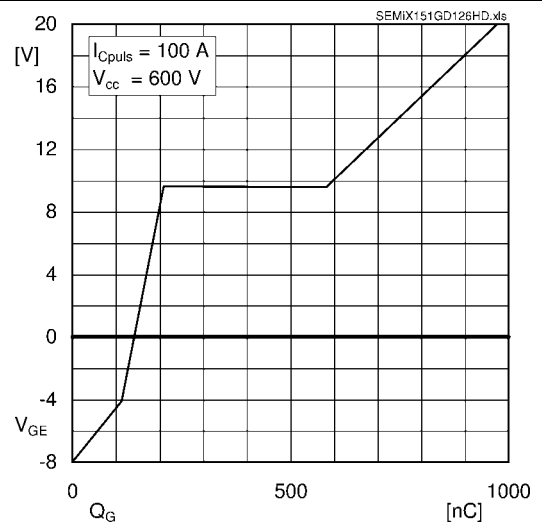


Fig. 6: Typ. gate charge characteristic

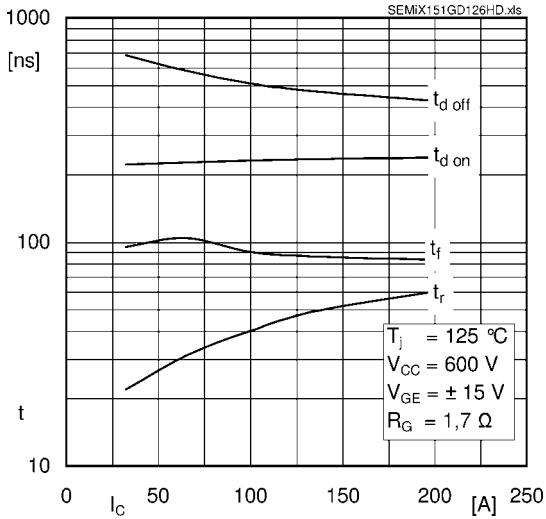


Fig. 7: Typ. switching times vs.  $I_C$

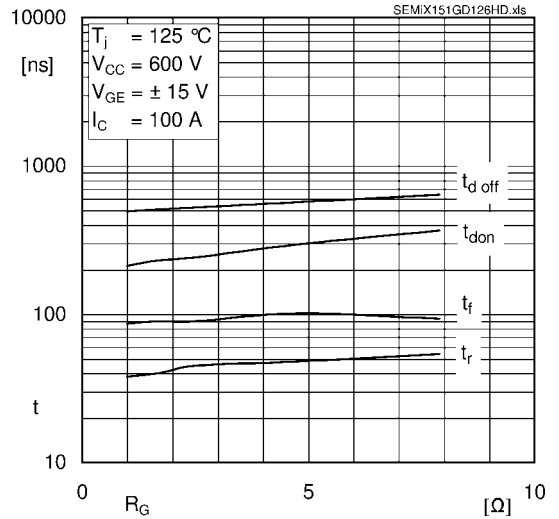


Fig. 8: Typ. switching times vs. gate resistor  $R_G$

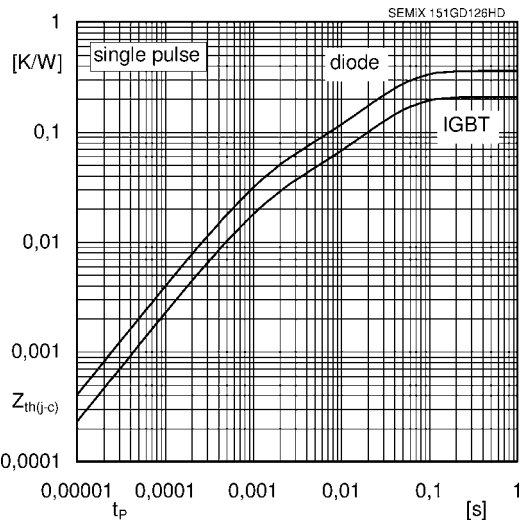


Fig. 9: Typ. transient thermal impedance

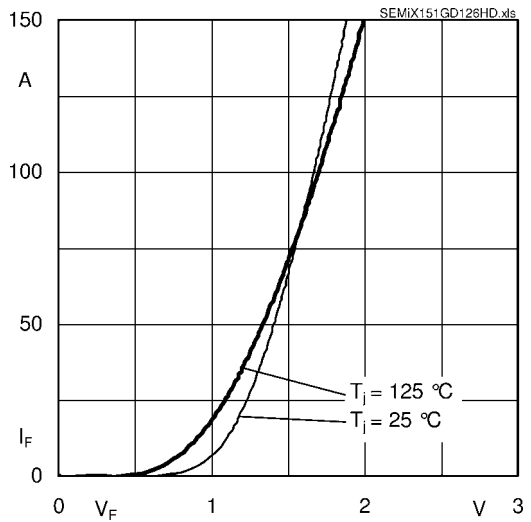


Fig. 10: Typ. CAL diode forward charact., incl.  $R_{CC+EE'}$

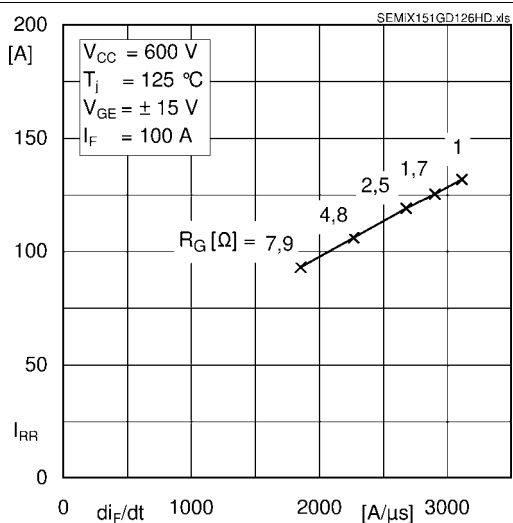


Fig. 11: Typ. CAL diode peak reverse recovery current




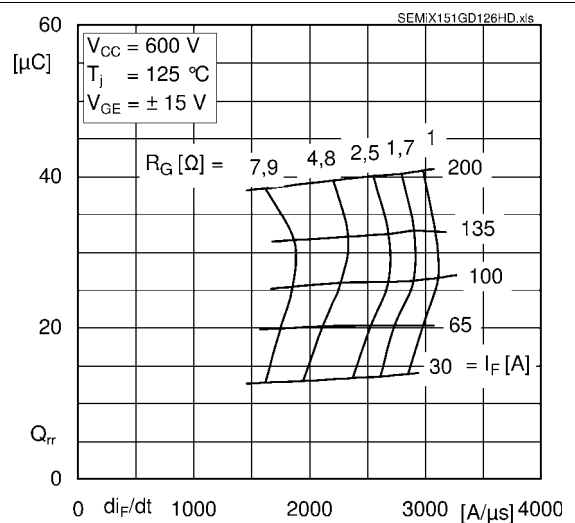


Fig. 12: Typ. CAL diode recovery charge

# SEMiX151GD126HDs

Case: SEMiX 13

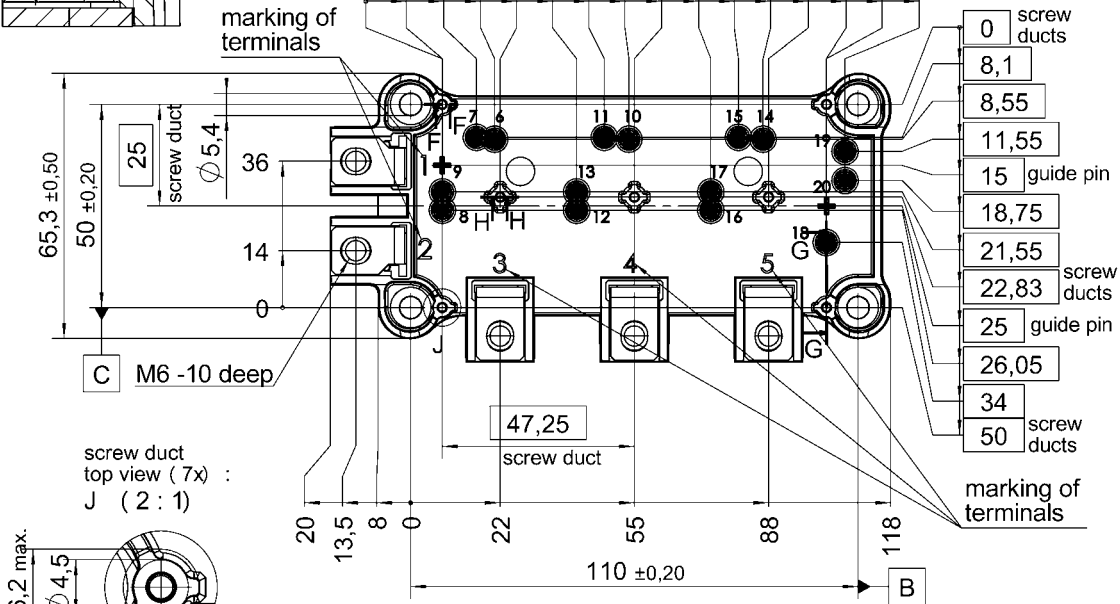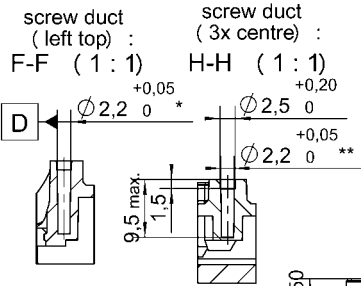

\*screw duct left / top with  $\phi \begin{smallmatrix} 0,2 \\ 0,2 \end{smallmatrix} \begin{smallmatrix} A \\ A \end{smallmatrix} \begin{smallmatrix} B \\ D \end{smallmatrix} \begin{smallmatrix} C \\ C \end{smallmatrix}$

\*\*screw ducts / guide pins / spring ducts with  $\phi \begin{smallmatrix} 0,2 \\ 0,2 \end{smallmatrix} \begin{smallmatrix} A \\ A \end{smallmatrix} \begin{smallmatrix} D \\ D \end{smallmatrix} \begin{smallmatrix} C \\ C \end{smallmatrix}$


Rules for the contact PCB:

- holes guidepins =  $\phi 4 \pm 0,1$  / position tolerance  $\pm 0,1$
- holes for screws =  $\phi 2,9 \pm 0,1$  / position tolerance  $\pm 0,1$
- spring contact pad =  $\phi 3,6 \pm 0,1$  / position tolerance  $\pm 0,1$

general tolerance:  
ISO 2768-mK  
ISO 8015

All measures in Z-direction valid when mounted to heat sink

## SEMiX 13

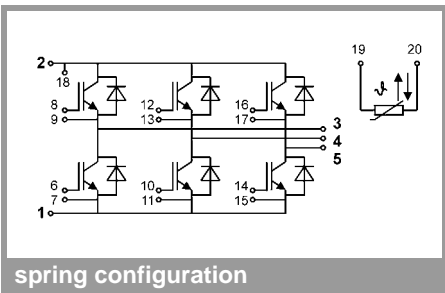

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.